

## AMENDMENTS TO THE DRAWINGS

In response to the Office action identified above,  
Fig. 2-5 has been revised. One clean copy of Fig. 2-5  
5 has been provided along with one marked copy showing  
the changes made.

In Fig. 2, the acoustic signal input device (22)  
comprises an amplifying element array (30), and the  
acoustic signal output device (26) comprises another  
10 amplifying element array (40). The hearing aid device  
receives an acoustic signal input and outputs an acoustic  
signal output.

In Fig. 3, the acoustic signal input device (22) receives  
an acoustic signal input and comprises an amplifying element  
15 array (30).

In Fig. 4, the acoustic signal output device (26) comprises  
an amplifying element array (40) and outputs an acoustic signal  
output.

In Fig. 5, the bandpass filter (32) comprises two acoustic  
20 receiving units (11), (12) with different resonant  
frequencies and a differential amplifier (13).

No new matter is introduced.

25

Attachment: Replacement Sheet  
Annotated Sheet Showing Changes

30

## **REPLACEMENT SHEET**

5

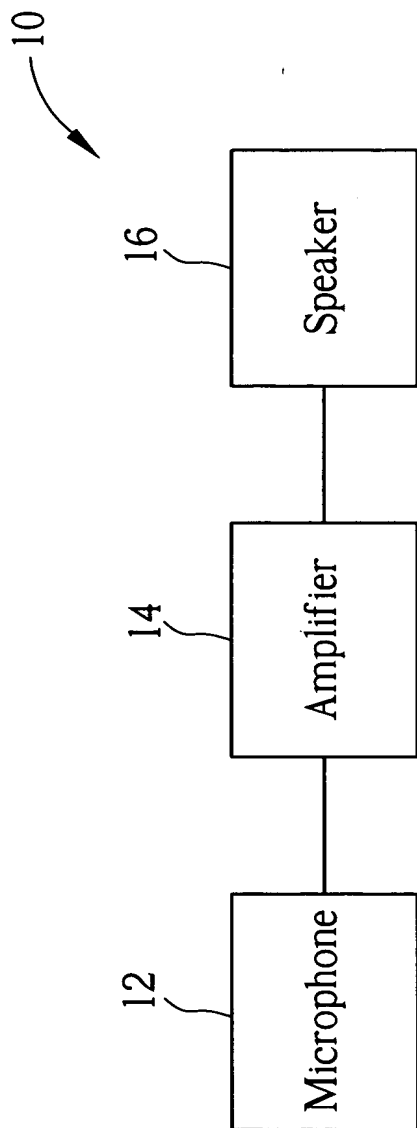


Fig. 1 Prior art

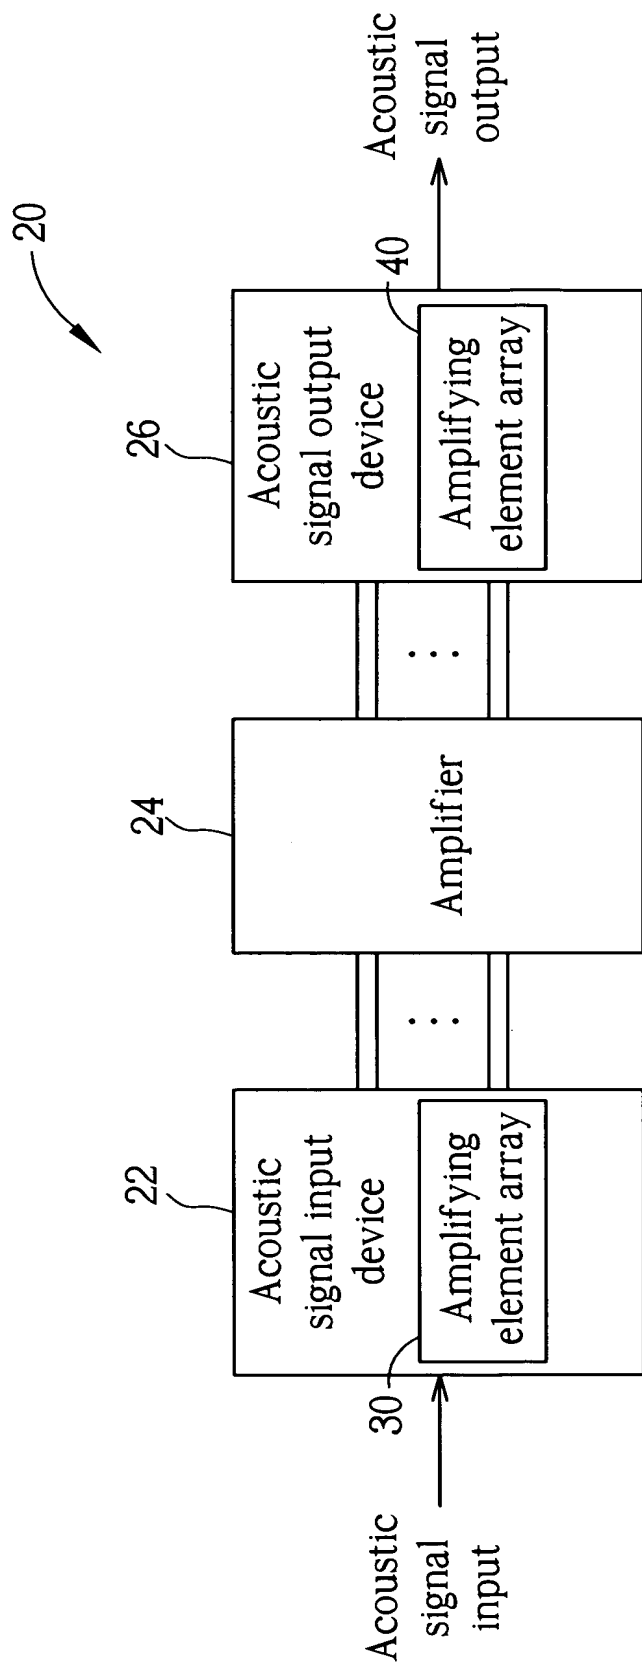


Fig. 2

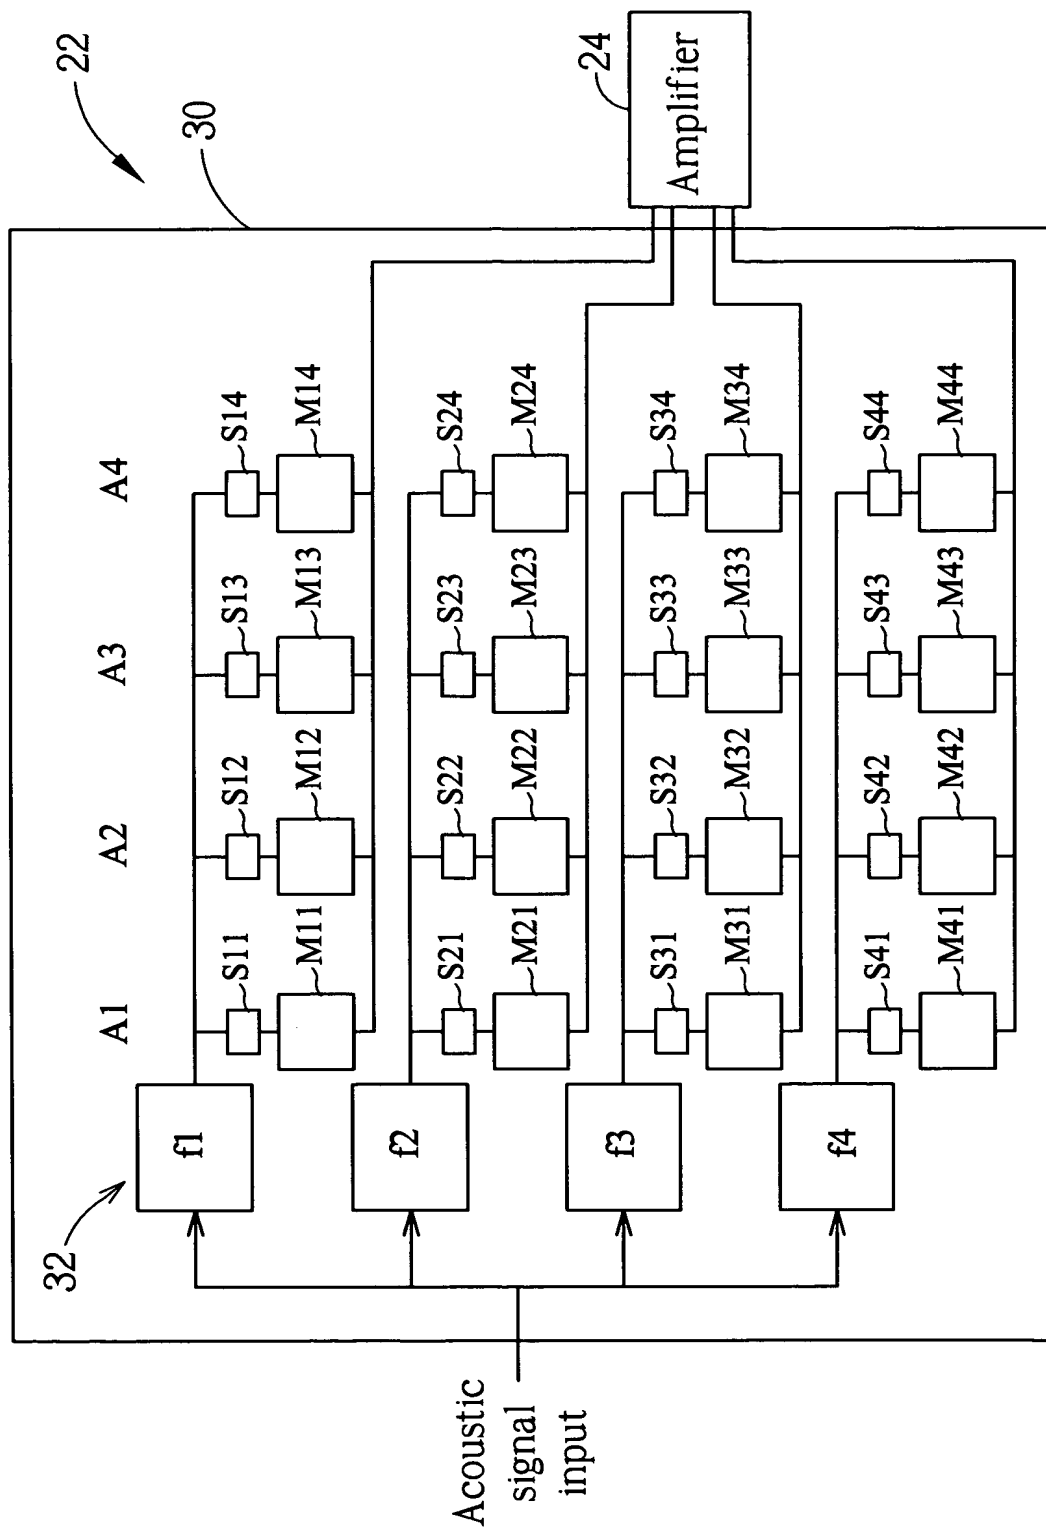


Fig. 3

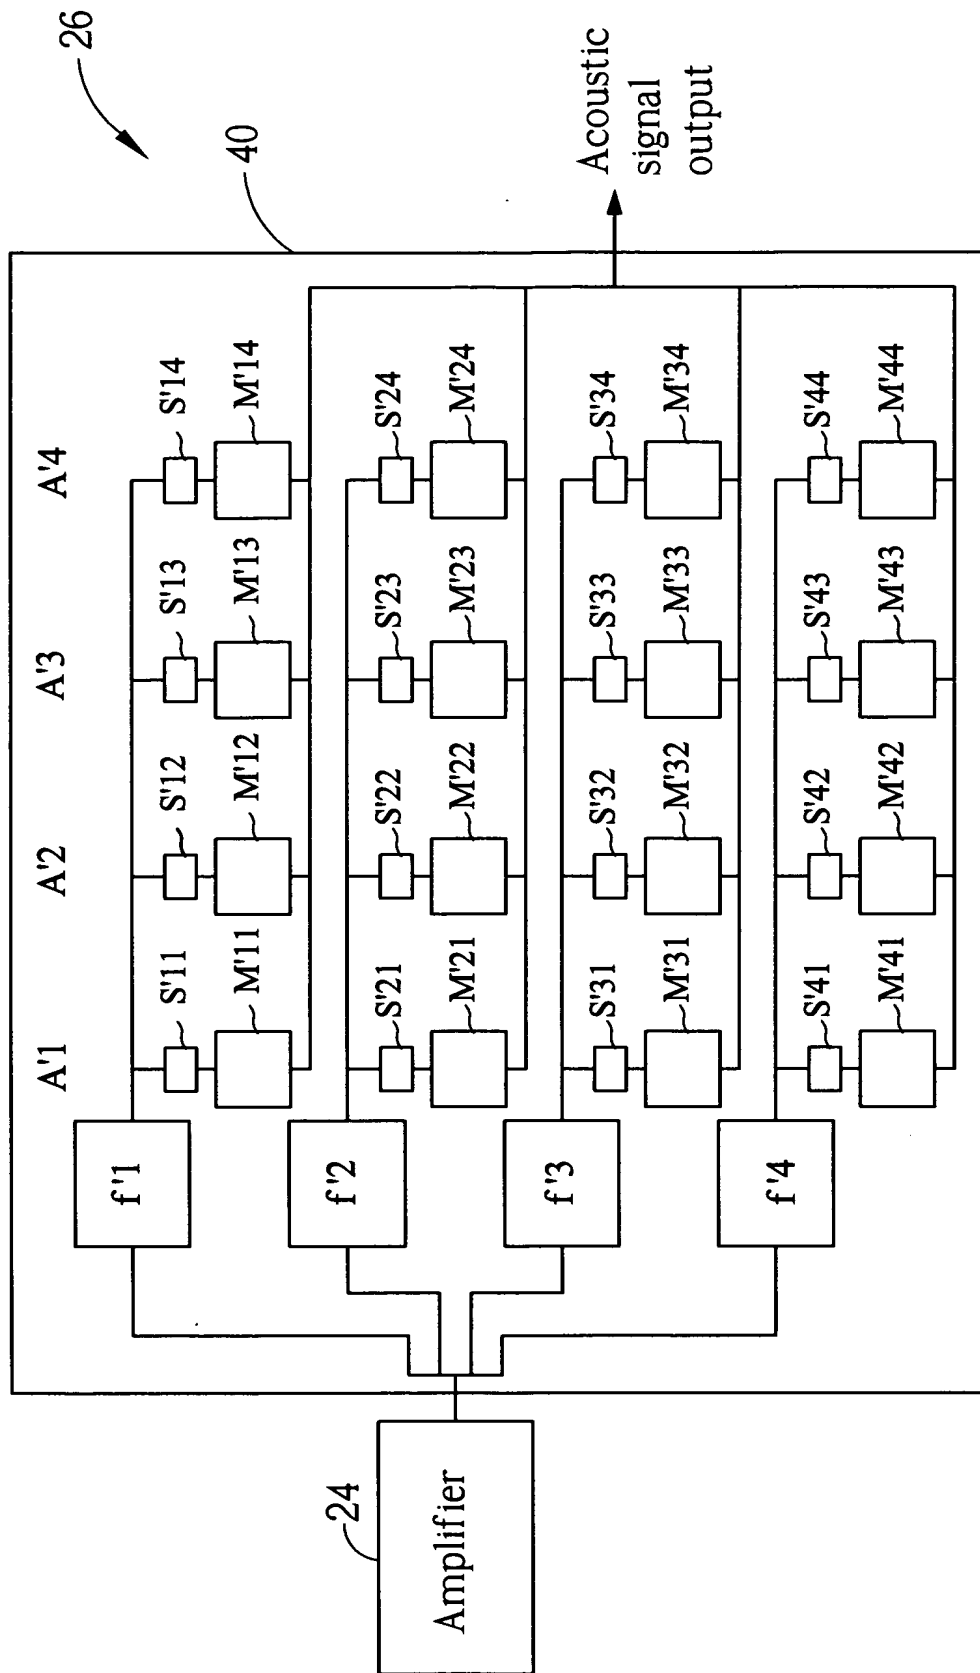


Fig. 4

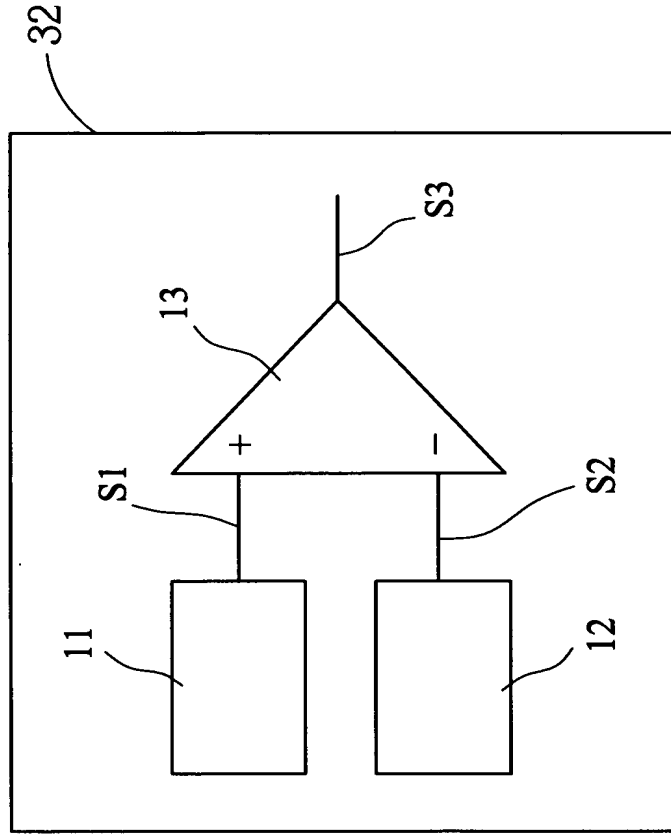


Fig. 5